



R&E

ROBOTICS &
END OF LINE

KAYAT SRX-CTP TRAY PACK & SHRINK BUNDLING SYSTEM



An integrated solution delivering line efficiency and packaging productivity.

The SRX-CTP is a part of the Kayat SRX Series single roll bundlers. It has all of the access, maintenance and reliability features of the SRX-CTF, but also provides a product handling and tray packing module. Designed to handle and pack a wide variety of packaged food and beverage products, the SRX-CTP uses a single roll of clear or print registered film to wrap and pack trays of product at up to 60 cycles per minute.

The SRX-CTP is a continuous motion tray shrink machine. It handles products to form the tray around the product then wrap it with a single roll of film. Similar to the rest of the Kayat SRX series machines, the SRX-CTP has a robust, industrial design while providing easy access for operation and maintenance.


FEATURES AND BENEFITS

- Servo controlled product guidance for smooth and precise pattern forming
- Toolless Adjustable Wrap Bar Assembly - Easily adjust wrap zone for package height with no change parts
- Easy Maintenance Access - Film feed and cut assembly slides out for easy maintenance
- Uses Clear or Print Registered Film
- State-of-the-Art Air Flow Control - Easily adjust air flow to create the most appealing appearance on the end product
- Dual roll film mandrels with manual splice - Minimizes roll to roll changeover time
- Updated Allen-Bradley controls package including predictive maintenance flags for common wear parts

TYPICAL PRODUCT SPECIFICATIONS

SRX SERIES SINGLE ROLL BUNDLER		SRX-CTP Integrated Tray Pack & Shrink Bundling System	
Minimum Package Size Both Height & Width cannot be at maximum dimension	3" Height 7.25" Width (Across the Machine) 6" Length (Direction of Flow)	Minimum Blank Size Including Tray	13" Width 9" Length 1" Tray Wall Height
Maximum Package Size Both Height & Width cannot be at maximum dimension	12" Height 19" Width (Across the Machine) 12.7" Length (Direction of Flow)	Maximum Blank Size Including Tray Wall	25" Width 19" Length 3" Tray Wall Height
Film Width	Maximum: 29" Width		
Film Diameter	Maximum: 20" Diameter		
Film Types	Clear or Print-Registered		
Construction	Heavy-duty welded tubular steel standard; optional corrosion resistant design for wipe down environments		
Orientation	Right or Left-hand configuration available		
Magazine Capacity	Aproximately 600 blanks (b-flute)		
Speed	Up to 60 cycles per minute		
Glue System	Nordson		
Country of Origin	Designed and manufactured in the USA		

SRX SERIES TYPICAL MACHINE LAYOUT

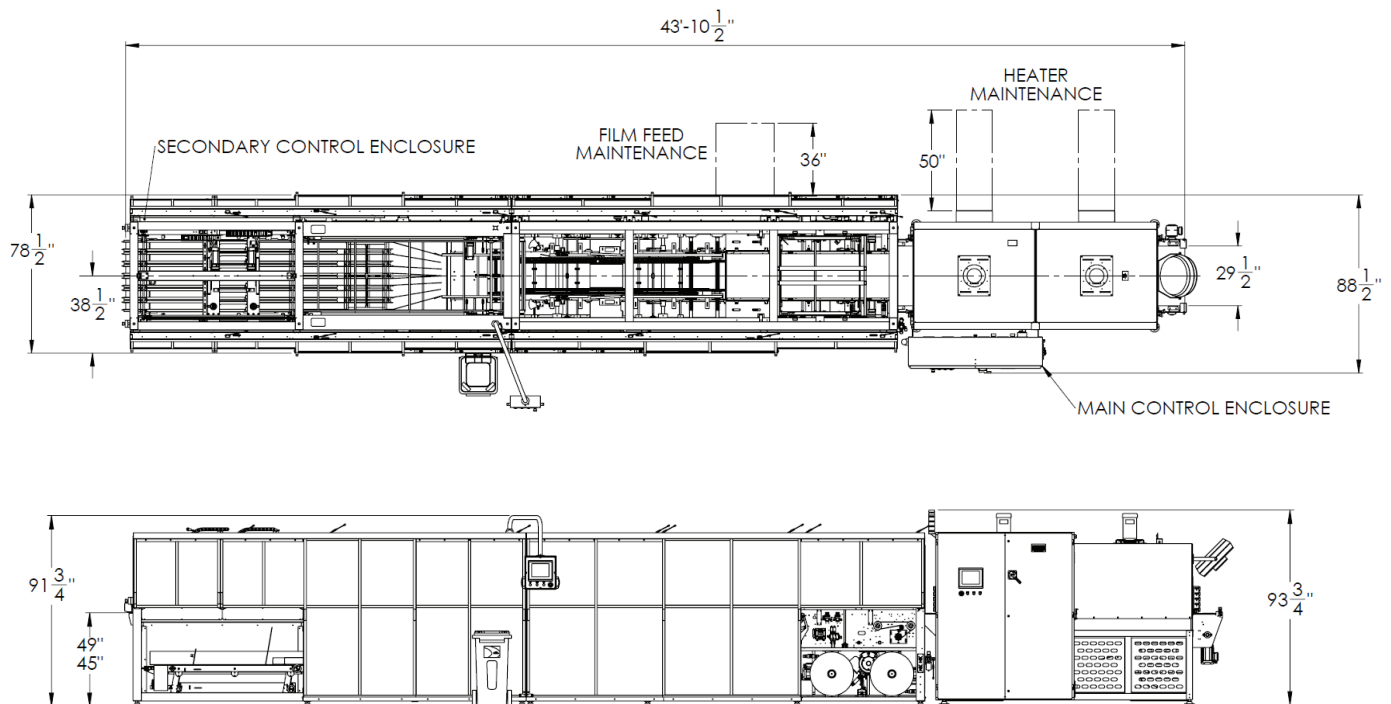

©2025 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse CTP

PHONE
636-239-7424

EMAIL
Texwrap@ProMachBuilt.com

WEB
Texwrap.com

525 Vossbrink Drive
Washington, Missouri 63090