




R&E

ROBOTICS &  
END OF LINE

## KAYAT SRX SINGLE ROLL BUNDLER FOR TRAYS OF PRODUCT

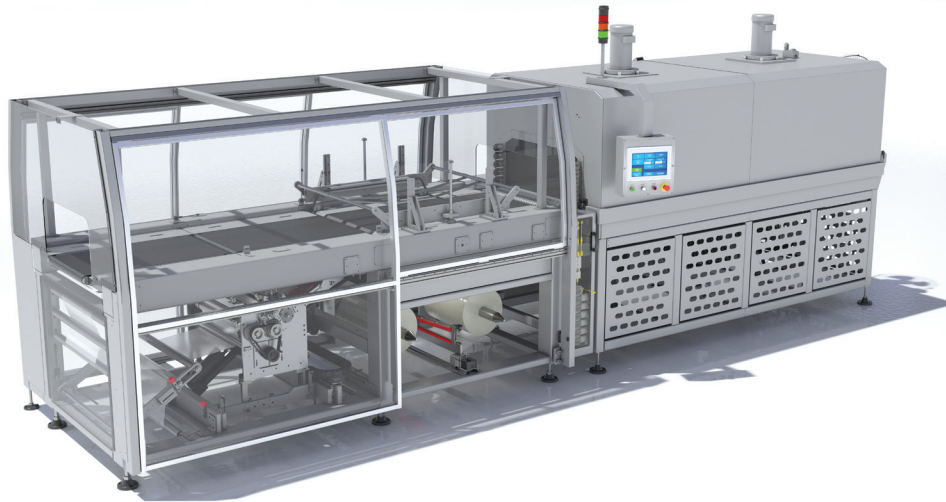

### Robust tray shrink machine with reduced maintenance and improved user-interface.

The Kayat SRX series single roll bundlers offers two machines to wrap trays of product: the SRX-CTF and the SRX-LTF. These machines create shrink bundled packages with bullseyes by wrapping pre-formed trays of product with shrink film. The SRX uses a bottom overlap seal technology for strong seals and the ability to showcase printed film graphics.

Designed to handle a wide variety of packaged food and beverage products, the SRX-CTF and SRX-LTF use a single roll of clear or printed film with speeds up to 60 cycles per minute. The SRX-LTF can achieve speeds up to 35 cycles per minute while the SRX-CTF can run up to 60 cycles per minute which provides a shrink bundler to meet most applications.

The SRX series has a robust, industrial design that was created with the operator in mind. Both the SRX-CTF and SRX-LTF provide easy access for operation and maintenance as well as toolless adjustable wrap bar assemblies to easily adjust the wrap zone for package height.


#### FEATURES AND BENEFITS

- **Toolless Adjustable Wrap Bar Assembly** - Easily adjust wrap zone for package height with no change parts
- **Easy Maintenance Access** - Film feed and cut assembly slides out for easy maintenance
- **Uses Clear or Print Registered Film**
- **State-of-the-Art Air Flow Control** - Easily adjust air flow to create the most appealing appearance on the end product
- **Dual Roll Film Mandrels with Manual Splice** - Minimizes roll to roll changeover time (CTF)
- **User Friendly Allen-Bradley Controls Package** - Includes predictive maintenance flags for common wear parts


### TYPICAL PRODUCT SPECIFICATIONS

SRX SERIES SINGLE ROLL BUNDLER	SRX-CTF	SRX-LTF
<b>Rate</b>	Up to 60 cycles per minute	Up to 35 cycles per minute
<b>Minimum Package Size</b> Both Height & Width cannot be at maximum dimension	3" Height 6" Width (Across the Machine) 5" Length (Direction of Flow)	3" Height 6" Width (Across the Machine) 5" Length (Direction of Flow)
<b>Maximum Package Size</b> Both Height & Width cannot be at maximum dimension	12" Height 20" Width (Across the Machine) 12" Length (Direction of Flow)	12" Height 20" Width (Across the Machine) 12" Length (Direction of Flow)
<b>Film Width</b>	Maximum: 30" Width	Maximum: 30" Width
<b>Film Diameter</b>	Maximum: 20" Diameter	Maximum: 20" Diameter
<b>Film Types</b>	Clear, Print-Registered	Clear, Print-Registered
<b>Construction</b>	Heavy-duty welded tubular steel standard; optional corrosion resistant design for wipe down environments	Heavy-duty welded tubular steel standard; optional corrosion resistant design for wipe down environments
<b>Orientation</b>	Right or Left-hand configuration available	Right or Left-hand configuration
<b>Tunnel</b>	Dual chamber tunnel	Single chamber tunnel
<b>Country of Origin</b>	Designed and manufactured in the USA	Designed and manufactured in the USA

### SRX-CTF SERIES TYPICAL MACHINE LAYOUT

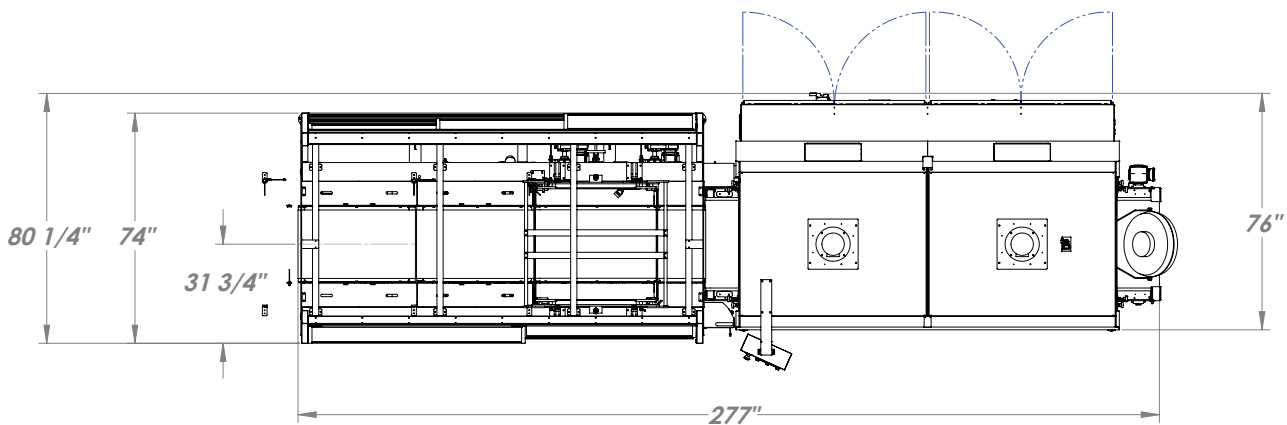

### SRX-LTF SERIES TYPICAL MACHINE LAYOUT

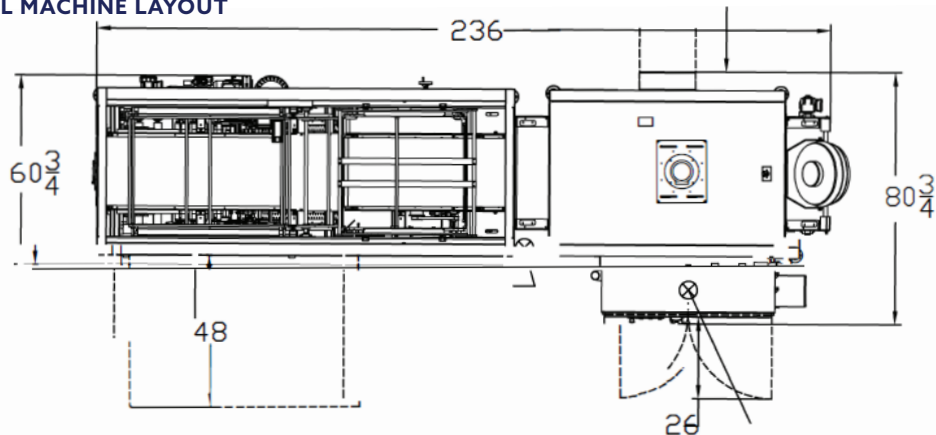

©2022 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse  
SPEC SHEET - Kayat SRX-CTFLT

